


0/1-10V dimmer

110REC-DIN

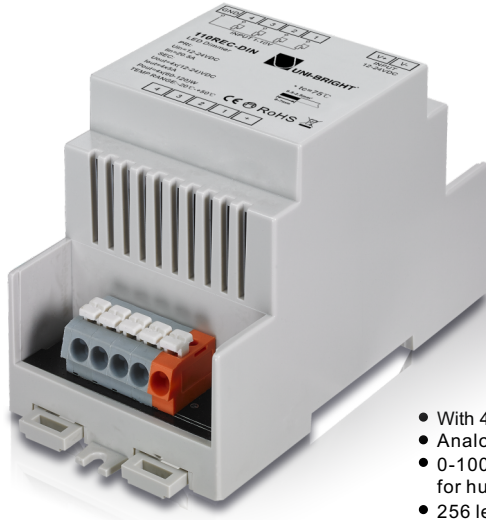


- With 4 Channel 0/1-10V signal Input, 4 Channels PWM Output
- Analog dim driver, receive standard 1-10V dim signal input
- 0-100% dimming range via logarithmic characteristic, perfect for human's vision
- 256 levels of Grey scales, smoothly without any flash
- To work with power repeater to expand output unlimitedly.
- Can coordinate with 1-10 regulator or 1-10V dimmer to do analog dimming, smooth dimming curve, be in direct proportion to voltage curve of regular.


Parameter

Part No.	Input Voltage	Output Current	Output Power	Remarks
110REC-DIN	12-36VDC	4x5A	4x(60-180)W	Constant voltage

Product Size

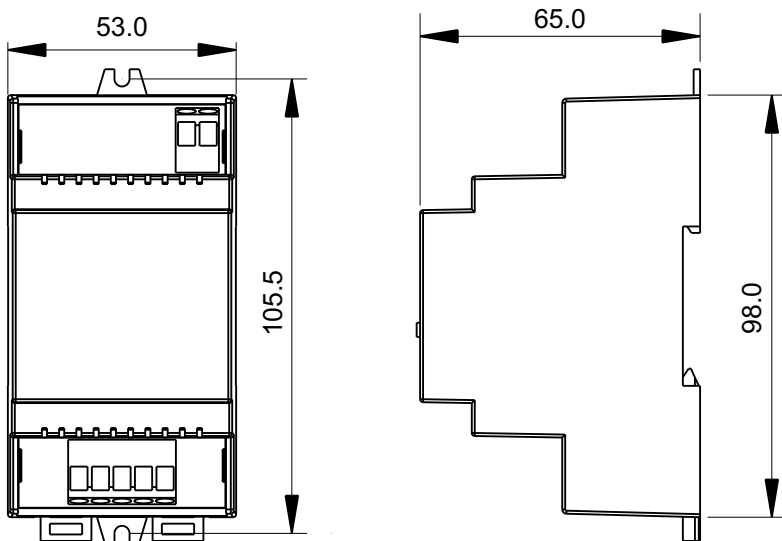

Wiring diagram

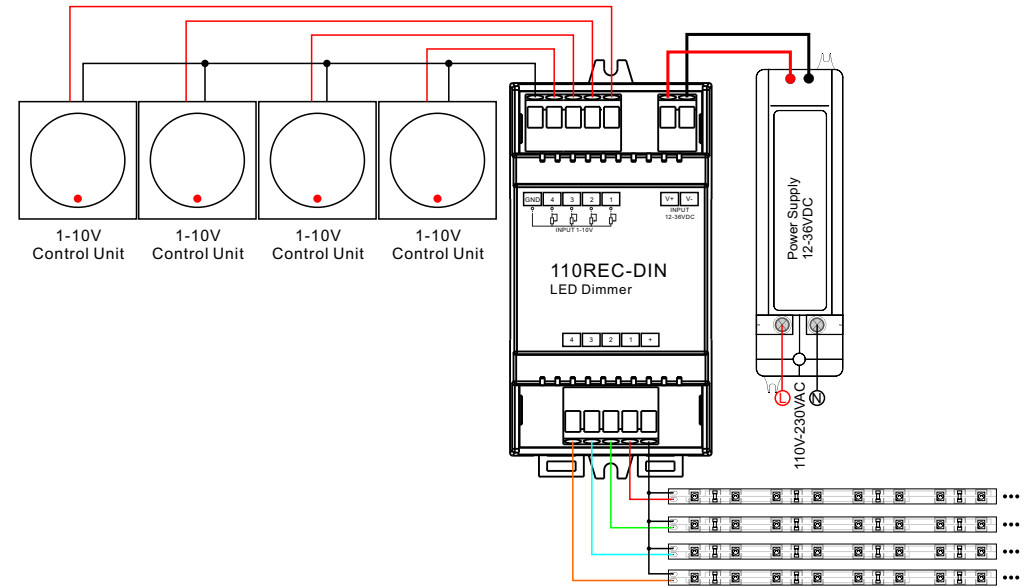

Safety & Warnings

- 1) The product shall be installed and serviced by a qualified person.
- 2) IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- 6) Please ensure that the cable is secured tightly in the connector
- 7) For update information please consult your supplier.